


# MUR1995 HD-TVI & Analogue Fixed Lens Eyeball Camera

Camera  
digital security



Rev. no: 00  
Publish Date: 08.10.2017

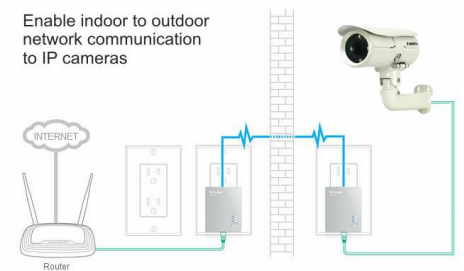

## Product Overview

Ever popular external IR eyeball camera with a fixed 3.6mm lens for recording 1080p HD-TVI images. The MUR1995 has a HD-TVI and analogue output making it a smart option for both upgrades and new system installs.

The eyeball camera has a 2.1 Mega Pixel 3.6mm fixed lens suitable on a large number of installs. The 24 built-in IR LEDs with a 15m+ range guarantee you won't miss a thing even on the darkest of nights.

This superb high performance camera features a 1/28 inch 2.1 Mega Pixel Sony image sensor for capturing stunning 1080p HD images, a true day-night mechanical IR filter, 8x digital zoom, Wide Dynamic Range to maintain optimum light levels in bright and dark areas of the image and 3D digital noise reduction.

The eyeball camera can be installed externally or internally and can be ceiling or wall mounted. The MUR1995 is available in 2 colours, Graphite Grey or Polar White.

## Accessories



FS 001  
4 x Fixing Screws



WP 001  
4 x Wall Plugs



CB001  
Cable

[www.murcam.com](http://www.murcam.com)

P: 718-10071859

E: [sales@murcam.com](mailto:sales@murcam.com)

1/2

## HD-TVI & Analogue Fixed Lens Eyeball Camera

### Technical Specifications

Camera	
Image sensor	1/2.8" 2.1MP Sony CMOS
Min. Illumination	2.1MP 3.6mm Fixed
Shutter Speed (s)	1/60~1/100,000sec (N), 1/50~1/100,000sec (P)
Slow Shutter	Support
Lens (mm)	2.8-12mm
Lens Mount Type	Φ14
Angle Adjustment	Pan:0°- 355°, Tilt: 0°- 75°, Rotation: 0°- 355
Day & Night	Yes
WDR (dB)	Yes
Video	
Compression	H.264/MJPEG/H.264+
Resolutions	1920 x 1080p
Video streaming	Multiple, individually configurable streams in H.264 and Motion JPEG Controllable frame rate and bandwidth VBR/MBR H.264
Frame Rate	25FPS - 1080P
Video Output	1080P, 720P
Image Settings	Compression, Color, Brightness, Sharpness, Contrast, Local contrast, White balance, Exposure control, WDR – Forensic Capture: up to 115 dB depending on the scene. Rotation: 0°, 90°, 180°, 270° including Corridor Format, Text and image overlay, Privacy masks, Mirroring of images
Pan/Tilt/Zoom	No - Manual Adjustment
Day/Night Switch	Automatic
OSD Menu	Multi-language
Enhancement	BLC/HLC/WDR
Gain Control	Yes
Noise Reduction	3D-DNR
White Balance	Auto/Manual
Network	
Security	Password protection, IP address filtering, HTTPS encryption, User access IEEE 802.1X network access control, Digest authentication, User access log, Centralized Certificate Management
Supported protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP
Storage	NAS (Support NFS, SMB/CIFS); ANR, Built-in MicroSD/SDHC/SDXC card slot, up to 128 GB
Detection	Intrusion detection, Line crossing detection, Motion detection, Dynamic analysis
Alarm Trigger	Tampering alarm, Network disconnect, IP address conflict, Storage exception
General Functions	One-key reset, Anti-flicker, heartbeat, mirror, password protection
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI

### System Integrations

Application	
Programming Interface (API)	Open API for software integration
Event triggers	Analytics, Edge storage events
Event actions	Notification: email, HTTP, HTTPS and TCP and SNMP trap Video recording to edge storage Send video clip Pre- and post-alarm video buffering Overlay text
Data-streaming	Event data
Construction	
Casing	IP42 water and dust resistant (to comply with IP42, following instructions in Installation Guide) ASA polymer casing Encapsulated electronics Captive screws (Torx 10)
Net Weight	0.49kg (1.08lb)
Gross Weight	0.60kg (1.32lb)
Electrical	
Power Supply	24V±25% / DC 12V±25%
Power Consumption	Max 4.7W (12V DC, IR on)
Interface	
Audio Interface	1-channel audio in
Alarm Interface	2-channel alarm in & 1-channel alarm out
Other Info	
Operating conditions	-30°C ~ +60°C (-22°F ~ +140°F) Less than 90% RH * Start up should be done at above -30°C (-22°F)
Storage Conditions	-30°C ~ +60°C (-22°F ~ +140°F) Less than 90% RH
IR Range	30m IR Range - 36PCS LEDs
Color Options	Satin Black
Warranty	2 years advanced replacement warranty
Ordering Info	
APIP4DO/BL	

### Disclaimer

Those presented in this document, our research so far, our experience and knowledge within the information provided is accurate. In case of changes in operating conditions and methods of application, any information given in this document can not be considered as guarantees and preliminary tests are recommended. For more information and our technical team and our laboratory will provide support services.