



Powersea Optical Power Meter

TS001

An optical power meter (OPM) is the primary test instrument for fiber optic networks—measuring optical signal power is an essential task for any fiber technician. However, requirements for testing and certifying optical networks expand, technicians need their OPM to not just measure optical power, but also to document results and generate reports. Moreover, the rapid expansion of fiber into new applications created an influx of technicians that are new to fiber optic technology. These technicians need easy-to-use tools.

Our Powersea Meter is an innovative OPM that lets fiber technicians measure optical power without the need for a test lead. Instead, users attach interchangeable Power Meter connectors that engage safely to the bulkhead port without risking cross-contamination or damage to the fiber end face. It is a compact, intuitive, and reliable OPM equipped with a touch-screen display and onboard storage so users can measure data and store readings much faster than with traditional power meters. Power Meter is also Bluetooth enabled for pairing with various devices including mobile phones, tablets, PCs, and other Viavi Solutions test equipment, letting technicians quickly measure power, store data, generate reports, and share their results via e-mail.

KEY BENEFITS

- Eliminate the test lead when measuring optical power — connects directly to a bulk head
- Always ensure a safe test — contacting ferrule instead of fiber prevents link damage
- Easily access connections anywhere — adjustable arm rotates 360°
- Pair with your mobile device over Bluetooth

KEY FEATURES

- Interchangeable connectors connect directly to bulkhead port
- Supports multiple connector types including SC, LC, and SC-APC
- Pairs with other devices via Bluetooth
- Stores up to 125 test results on the device
- Measures wavelengths ranging from 780 to 1625 nm
- Micro-USB port for PC connection
- Re-chargeable Li-ion battery for 12 hours continuous use
- Touch screen

DATASHEET


Revision no: 01
Publish Date: 06.10.2017

www.busea.com

Powersea Optical Power Meter

Eliminate the Test Lead

Most field measurements are made with connectors located behind a bulkhead, which has a female interface. Since traditional OPMs also have a female interface, technicians have had to use various patch cords test leads. This forces technicians to carry an assortment of different patch cords with them that are compatible with the different connector ports in the network. Power Meter connects directly to the bulkhead port, eliminating test leads.

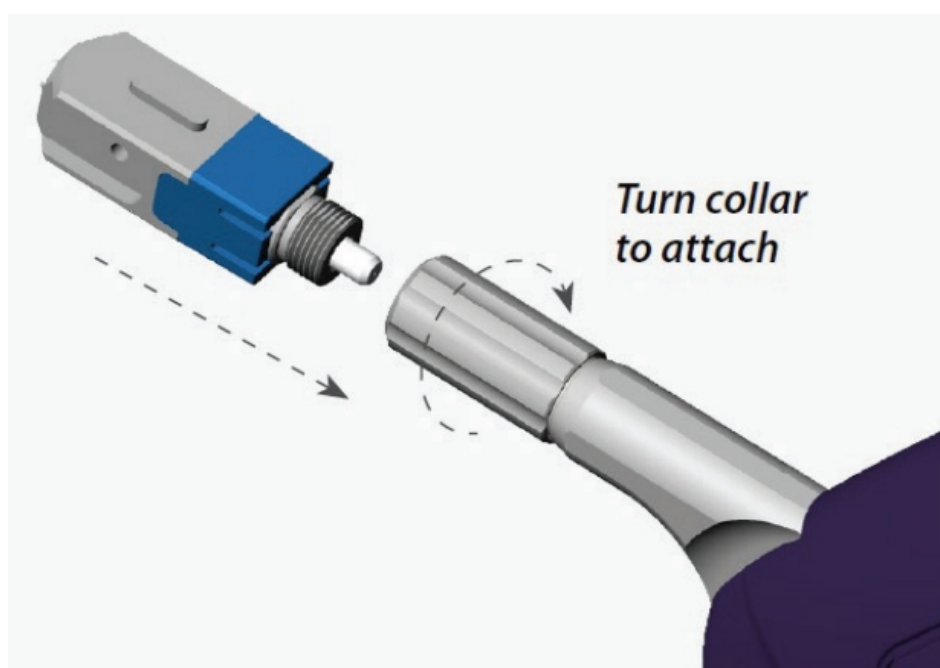

Always Ensure a Safe Connection

As loss budgets get increasingly strict, it is increasingly vital for technicians to maintain the quality of connector end faces throughout the network. Contaminated connectors are the #1 cause of troubleshooting in optical networks, compromising the accuracy of every measurement reading and damaging any lead to which they connect.

- Securely engage with bulkhead ports
- Make physical contact on the outer ferrule
- Prevent cross-contamination when connecting
- Prevent embedded debris in fiber end faces
- Are easily cleanable



Bluetooth Pairing with Mobile Devices

Smartphones and tablets are quickly becoming essential test devices, and apps let technicians perform essential tests with their mobile devices. Power Meter uses Bluetooth to enable a wide variety of capabilities.

- Full OPM operation with on-screen user interface
- Import stored readings from the Power Meter OPM
- Measure and store readings in real time
- Generate certification reports
- Share certification reports via email

Powersea Optical Power Meter

Specifications

Dimensions	100 x 57 x 25 mm
Weight	100 g
Display	128 x 128 x 1.5" OLED touch screen
Connector	USB 2.0 (Micro-B)
Power source	Li-ion battery, USB power
Run time	12 hours continuous, 24 hours ON idle
Power mode	Active, auto-off
Auto-shutoff time	User programmable
Charge time	4.5 hours from empty
Data storage	Yes (125 results)
EC/IEC/EN61326	Yes
Warranty	1 year
Power measurement ranges	
850 nm	-45 to +10 dBm
1300, 1310, 1490, 1550, 1625 nm	-45 to +10 dBm
Display range	-45 to +10 dBm
Maximum permitted input level	+10 dBm
Standard wavelength settings	850, 980, 1300, 1310, 1490, 1550, 1625 nm
Intrinsic uncertainty	±0.20 dB (±5%)
Linearity	±0.06 dB (-50 to +5 dBm)
Wavelength range	780 to 1650 nm
Wavelength and modulation result units	dBm, dB, Mw
Resolution	0.01 dB
Calibrated wavelengths	850, 1310, 1490, 1550, 1625
Wavelength settings	780 to 1650 in 1 nm steps

Ordering Information

Description	Part Number
Stand-Alone	
OPM, cable: USB male to micro-USB male, carrying pouch (Power Meter connectors sold separately)	BS-1
Connectors and Accessories	
BS Connector 02	BS-02
BS Connector 04	BS-03
BS Connector 06	BS-04
BS Connector 08	BS-05
BS Connector 10	BS-06
BS Connector 12	BS-07
Kits	
Kit: OPM (OP-1), 3 Power Meter connectors (SC, LC, SC APC), cable: USB male to micro USB male, carrying pouch, connector case	BS-12

Disclaimer

Copyright © 2017, BUSEA Inc. and/or its affiliates. All rights reserved. This document is provided for information purposes only, and the contents hereof are subject to change without notice. This document is not warranted to be error-free, nor subject to any other warranties or conditions, whether expressed orally or implied in law, including implied warranties and conditions of merchantability or fitness for a particular purpose. We specifically disclaim any liability with respect to this document, and no contractual obligations are formed either directly or indirectly by this document. This document may not be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without our prior written permission. Power Optic is registered trademarks of Busea Inc and/or its affiliates.

BUSEA Inc.

Address: Tesla Street 201676 Turkey

P: 0090 212 9876756

E-mail: info@busea.com

www.busea.com

Revision no: 01
Publish Date: 06.10.2017